

Technical data sheet

Junction box T 60, plug-in seal

Item number: 2007672



Junction box for the connection of cables indoors and in protected outdoor areas. Square design with plug-in seals to the sides and knock-out entries in the bottom. Suitable for wall and ceiling mounting and on mounting panels. With the option of fastening inside and to mount via the corner domes. Green cover for the labelling of specially designated cables and special circuits in the electrical installation (e.g. backup power, bus systems, etc.). Cover with quick lock, sealable. Made from halogen-free, UV-resistant materials.

Junction box according to DIN EN 60670. Flame-resistant to DIN EN 60695/2/11, test temperature 650°C. Impact resistance IK07 according to DIN EN 50102.

PP

Polypropylene

| Master data                        |                           |
|------------------------------------|---------------------------|
| Item number                        | 2007672                   |
| Type                               | T 60 GR-LGR               |
| Description 1                      | Junction box              |
| Description 2                      | with entries, green cover |
| Manufacturer                       | OBO                       |
| Dimension                          | 114x114x57                |
| Colour                             | Grey / green              |
| Material                           | Polypropylene             |
| Smallest sales unit                | 5                         |
| Unit of quantity                   | Piece                     |
| Weight                             | 12.3 kg                   |
| Weight unit                        | kg/100 pc.                |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,4582 kg CO2e / 1 Piece  |


# Technical data sheet

## Junction box T 60, plug-in seal


Item number: 2007672



### Dimensions

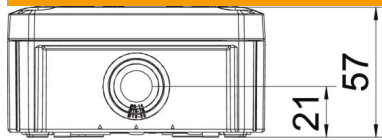

|        |        |
|--------|--------|
| Length | 114 mm |
| Width  | 114 mm |
| Height | 57 mm  |



### Technical data

|                                   |                                                           |
|-----------------------------------|-----------------------------------------------------------|
| Expandable                        | yes                                                       |
| No. of entries                    | 7                                                         |
| Type of entry                     | Plug-in seal                                              |
| Type of entry                     | Cable                                                     |
| Type of housing penetration       | Cuttable stepped membrane                                 |
| Measured insulation voltage $V_i$ | 500 V                                                     |
| Equipment                         | Without                                                   |
| Cover                             | Not transparent                                           |
| Cover fastening                   | Screwed                                                   |
| Entry from rear                   | yes                                                       |
| Entries                           | 7 x M25                                                   |
| Explosion-tested version          | no                                                        |
| Flame-resistant                   | acc. to VDE 0471/DIN 695 Part 2-1, test temperature 650°C |
| Shape                             | Square                                                    |
| Maintain electrical functions     | Without                                                   |
| For Ex zone                       | Without                                                   |
| For Ex zone gas                   | Without                                                   |
| For Ex zone dust                  | Without                                                   |
| Fibre-glass reinforced            | no                                                        |
| Halogen-free                      | yes                                                       |
| Clear internal dimensions         | 100x100x48 mm                                             |
| With screening                    | no                                                        |
| with lid                          | yes                                                       |
| Mounting type                     | Wall/ceiling mounting                                     |
| Nominal cross-section, min.       | 6 mm <sup>2</sup>                                         |
| Nominal voltage                   | 500 V                                                     |
| Sealable                          | yes                                                       |
| ROHS-conformant                   | yes                                                       |
| Protection rating                 | IP66                                                      |
| Protection rating IK code         | IK07.                                                     |

# Technical data sheet

Junction box T 60, plug-in seal

Item number: 2007672



## Technical data

|                                   |        |
|-----------------------------------|--------|
| Permitted temperature range, max. | 65 °C  |
| Permitted temperature range, min. | -25 °C |
| Transparent lid                   | no     |
| Weatherproof                      | no     |